

HIB2PI-S


PERFORMANCE LITE IP SD CAMERAS 2MP IP IR BULLET CAMERA

Honeywell's new Performance Lite IP camera series is aimed to provide high quality surveillance as an affordable offering for the small and medium businesses including small retail shops, gyms, schools, residential homes, etc.

The new series includes 2MP IR cameras, with SD card slot, in both eyeball and bullet configurations with fixed and variable lens options to cater to all kinds of customer applications. The cameras come with IR LEDs so as to provide effective and efficient surveillance even during the night time. The cameras are IP67 rated that makes them resilient for outdoor applications as well



HIB2PI-S



Sensor



Min.
Illumination




DWDR




Motion
Detection



Day & Night



AWB



POE



Water-proof

KEY FEATURES

- 2MP full real time recording
- H.265 codec compression
- Built-in microSD card slot (upto 128GB)
- 30 -50 m IR distance
- IK10 compliant housing in HIB2PIV-S
- IP 67 certified
- Support dual streams

HIB2PI-S

PERFORMANCE LITE IP SD CAMERAS

SPECIFICATIONS

| CAMERA | |
|--------------------------|---|
| Image Sensor | 1/2.7 CMOS |
| Number of Pixels (H x V) | 1920 x 1080 |
| Electronic Shutter | 1/25s ~ 1/ 100000s |
| Iris | Fixed Iris |
| Min Illumination | 0.002 lux @F1.2, AGC ON; 0 lux with IR |
| Lens | 3.6 mm @F1.6, Angle of View: 92.4 deg |
| Day & Night | TDN |
| Wide Dynamic Range | Digital WDR |
| IMAGE | |
| Video Compression | H.265 / H.264 / MJPEG |
| Compression Standard | Baseline / Main / High Profile |
| Resolution | 1080p, 720p, D1, CIF |
| Number of Streams | 2 (main stream ,sub stream) |
| Resolution | Main stream: 50Hz: 1080p / 720p @(1-25fps) Sub stream: 50 Hz: D1/CIF/480 x 240 @(1-25fps) |
| Bit Rate | 128 Kbps ~ 4 Mbps |
| Encode Mode | CBR / VBR (Freely adjustable in CBR, 5 levels in VBR) |
| Image Settings | ROI, Saturation, Brightness, Contrast, Wide Dynamic, Sharpen, Noise reduction, De-fog, Watermark, Heartbeat |
| ROI | 3 ROI |
| INTERFACES | |
| Network | RJ45 |
| FUNCTIONS | |
| Remote Monitoring | IE / Firefox Browsing, CMS control |
| Online Connection | Simultaneous monitoring for upto 4 users; support multi-stream real time transmission |
| Network Protocol | TCP/IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP, FTP, HTTPS |
| Interface Protocol | ONVIF S, ONVIF G |
| Motion Alarm | Supported |
| IR Distance | 30 – 50 m |
| IP Rating | IP67 |
| OTHERS | |
| Power Supply | DC 12V |
| Power Consumption | <5 W |
| IR Consumption ON | <10 W |

HIB2PI-S

PERFORMANCE LITE IP SD CAMERAS


Operating Temperature -30 deg C to 60 deg C, 90% humidity

Dimensions (mm) 80.5 x 217.7

Weight 640 g

DIMENSIONS

HIB2PI

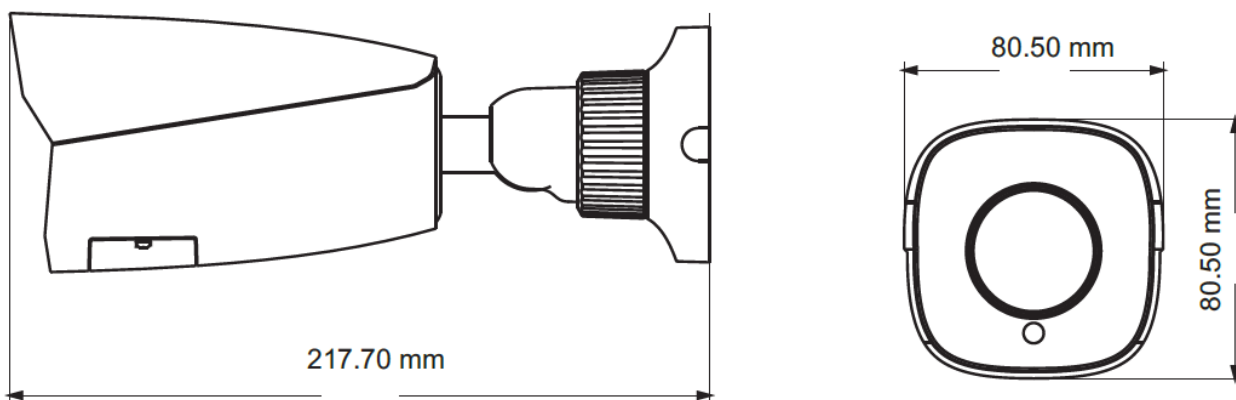

ORDERING

| | |
|--------|---|
| HIB2PI | 1/2.7" CMOS Sensor, 2 MP Fixed lens, SD slot, TDN, DWDR, 3.6 mm, 12 VDC / PoE |
|--------|---|

For more information,
<https://honeywellbuildings.in>
Call : +91 124 4975000
Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings
Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurugram - 122 002
Haryana India

www.honeywell.com

© 2020 Honeywell International Inc.

HIB2PI-S
PERFORMANCE LITE IP
SD CAMERAS
Honeywell